




## **D4S501 0.005 – 1.0 GHz 4-Way Power Divider/Combiner**


### **FEATURES**

- ❖ Low VSWR
- ❖ High Isolation
- ❖ Small Package
- ❖ Light Weight



### **SPECIFICATIONS**

<b>0.005 – 1.0 GHz 4-Way Power Divider/Combiner</b>	
Model Number	D4S501
Frequency Range	0.005 – 1.0 GHz
Insertion Loss	1.3 dB Typ., 1.6 dB Max.
Isolation	20 dB Typ., 17 dB Min.
Input VSWR	1.20:1 Typ., 1.28:1 Max.
Output VSWR	1.20:1 Typ., 1.25:1 Max.
Amplitude Balance	$\pm 0.10$ dB Typ., $\pm 0.25$ dB Max.
Phase Balance	$\pm 2.0^\circ$ Typ., $\pm 3.0^\circ$ Max.
Power Handling as Divider	0.5 W CW Max.
Impedance	50 $\Omega$
Connector Type	SMA Female

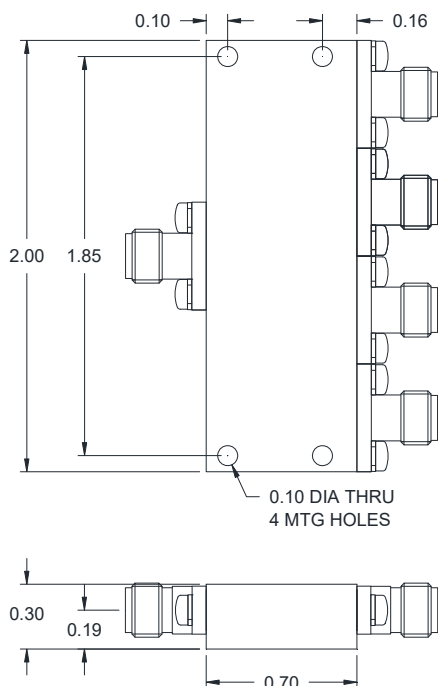

Design to meet the following environmental specifications:  
(verification optional)

1. Operating Temp: -55°C to +85°C
2. Storage Temp: -65°C to +125°C
3. Shock: MIL-STD-202F, M213, Cond B
4. Altitude: MIL-STD-202F, M105, Cond B
5. Vibration: MIL-STD-202F, M204, Cond B
6. Thermal Shock: MIL-STD-202F, M107, Cond A
7. Temp. Cycle: MIL-STD-202F, M105C, Cond D
8. Humidity: MIL-STD-202F, M103, Cond B  
(Optional with Hysol epoxy seal)

Standard Finishing: Rugged Aluminum Housing, optional finishing with blue epoxy paint per MIL-C-22750 available on request.

**Note:**

1. Insertion loss refers to the sum of the output power to the input power
2. Standard connector is SMA female for all the ports
3. Other connector combination is available on request
4. Power handling is under the condition that all the outputs are connected to the loads with 1.25:1 or better VSWR and the unit is mounted with excellent heat sink