




D840 DC – 40 GHz In-line Style 8-Way Resistive Power Divider


FEATURES

- ❖ Outstanding Amplitude and Phase Balance
- ❖ Small Size with Mounting Holes
- ❖ Low Insertion Loss
- ❖ Low VSWR

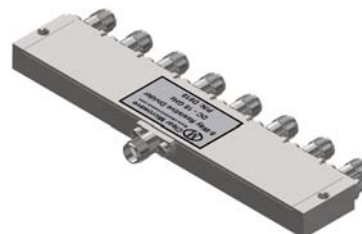

SPECIFICATIONS

DC – 40 GHz In-line Style 8-Way Resistive Power Divider	
Model Number	D840
Frequency Range	DC – 40 GHz
Nominal Power Splitting Loss	18 dB
Insertion Loss Above Splitting Loss	7.20 dB Typ., 7.80 dB Max.
Input VSWR	1.40:1 Typ., 1.50:1 Max.
Output VSWR	1.40:1 Typ., 1.50:1 Max.
Amplitude Balance	± 0.30 dB Typ., ± 0.50 dB Max.
Phase Balance	$\pm 5.0^\circ$ Typ., $\pm 8.0^\circ$ Max.
Power Handling As Divider	1 W CW
Connector Type	SMA Female

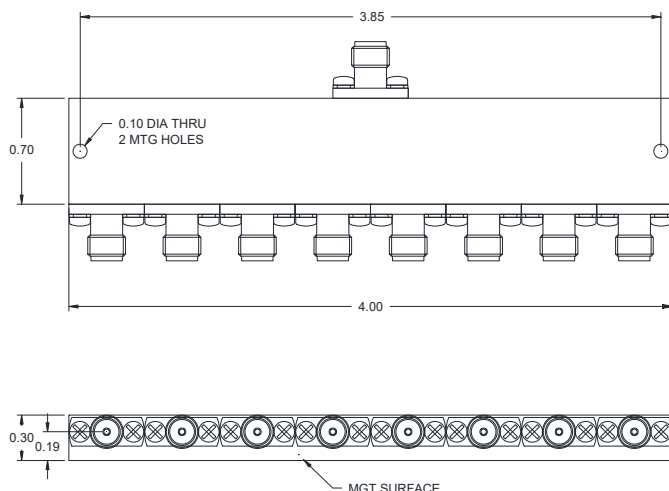

Design to meet the following environmental ratings:
(verification optional)

1. Operating Temp: -55°C to +85°C
2. Storage Temp: -65°C to +125°C
3. Shock: MIL-STD-202F, M213, Cond B
4. Altitude: MIL-STD-202F, M105, Cond B
5. Vibration: MIL-STD-202F, M204, Cond B
6. Thermal Shock: MIL-STD-202F, M107, Cond A
7. Temp. Cycle: MIL-STD-202F, M105C, Cond D
8. Humidity: MIL-STD-202F, M103, Cond B
(Optional with Hysol epoxy seal)

Standard Finishing: Rugged Aluminum Housing.
Optional finishing with blue epoxy paint per
MIL-C-22750 available on request.

Note:

1. The standard connector is SMA female, other connector available on request
2. Insertion loss is average loss of all channels above nominal loss
3. Power handling is under the condition that all outputs are connected to the loads with 1.1:1 or better VSWR and the unit is mounted with excellent heat sink