



## TSP26G DC – 26.5 GHz SMA Male Termination


### APPLICATIONS

- ❖ Low VSWR for Test Set-up
- ❖ Wireless Communications
- ❖ Satellite Communications
- ❖ Defense & Radar Systems
- ❖ Mates with K and 3.5 mm connectors



### SPECIFICATIONS

DC – 26.5 GHz SMA Male Termination	
Model Number	TSP26G
Frequency Range	DC – 26.5 GHz
Impedance	50Ω
VSWR	1.30:1 Max.
Input Power	1 W CW Max.
Connector Type	SMA Male
Connector Center PIN	Beryllium copper, Gold plated
Insulation	PTFE
Brass with Nickel plated	Brass with Nickel plated
Brass with Nickel plated	Brass with Nickel plated
-55°C to +85°C	-55°C to +85°C
-55°C to +125°C	-55°C to +125°C

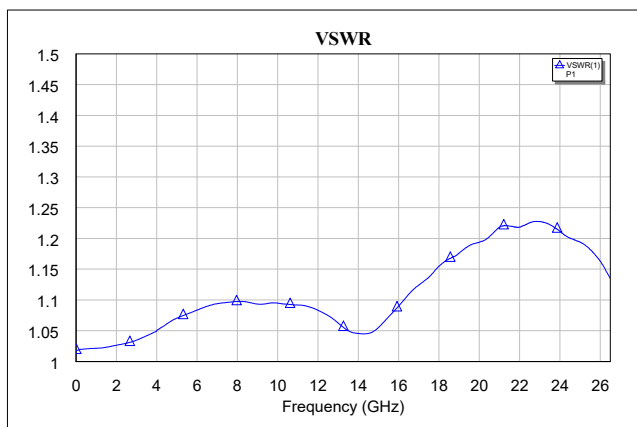

Typical VSWR vs Frequency

