



TST12V DC – 12 GHz SMA Male Termination


APPLICATIONS

- ❖ Low VSWR for Test Set-up
- ❖ Wireless Communications
- ❖ Satellite Communications
- ❖ Defense & Radar Systems
- ❖ Mates with K and 3.5 mm connectors



SPECIFICATIONS

DC – 12 GHz SMA Male Termination	
Model Number	TST12V
Frequency Range	DC – 12 GHz
Impedance	50Ω
VSWR	1.10:1 Max.
Input Power	1 W CW Max.
Connector Type	SMA Male
Connector Center PIN	Beryllium copper, Gold plated
Insulation	PTFE
Connector Nut	Brass with Gold or Nickel plated
Connector Housing	Brass with Gold or Nickel plated
Operating Temperature	-55°C to +85°C
Storage Temperature	-55°C to +125°C

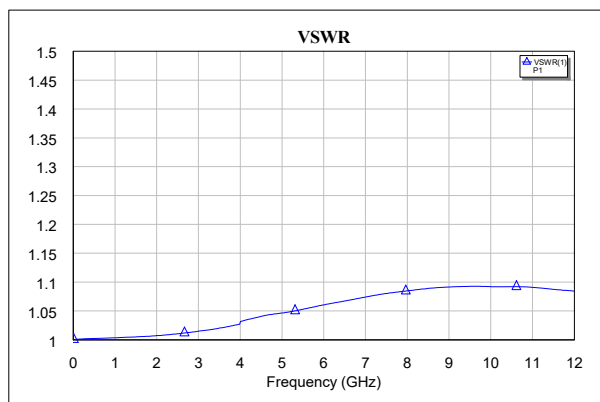

Typical VSWR vs Frequency

