



D40213R 2 – 13 GHz 4-Way Reactive Power Divider


FEATURES

- ❖ Low VSWR
- ❖ Light Weight
- ❖ Small Package
- ❖ Excellent Amplitude & Phase Tracking



SPECIFICATIONS

2 – 13 GHz 4-Way Reactive Power Divider	
Model Number	D40213R
Frequency Range	2 – 13 GHz
Nominal Power Splitting Loss	6.0 dB
Insertion Loss	0.90 dB Typ., 1.30 dB Max.
Input VSWR	1.30:1 Typ., 1.40:1 Max.
Amplitude Balance	± 0.50 dB Typ., ± 0.80 dB Max.
Phase Balance	$\pm 5.0^\circ$ Typ., $\pm 7.0^\circ$ Max.
Power Handling	100 W CW Total
Connector Type	SMA (other connector available on request)
Impedance	50 Ω

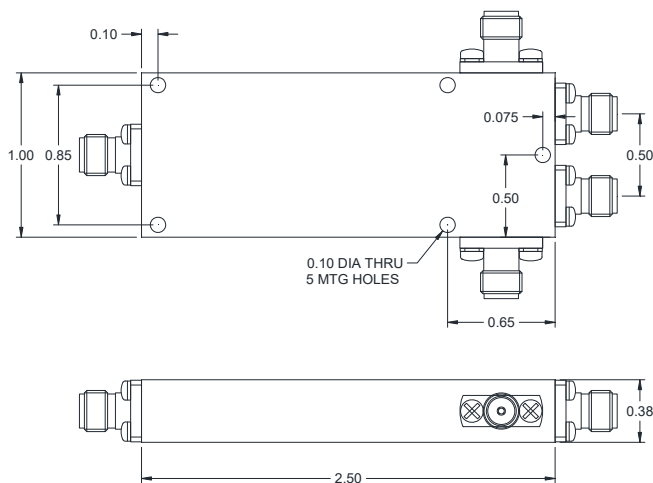

Design to meet the following environmental specifications:
(verification optional)

1. Operating Temp: -55°C to +85°C
2. Storage Temp: -65°C to +125°C
3. Shock: MIL-STD-202F, M213, Cond B
4. Altitude: MIL-STD-202F, M105, Cond B
5. Vibration: MIL-STD-202F, M204, Cond B
6. Thermal Shock: MIL-STD-202F, M107, Cond A
7. Temp. Cycle: MIL-STD-202F, M105C, Cond D
8. Humidity: MIL-STD-202F, M103, Cond B
(Optional with Hysol epoxy seal)

Standard Finishing: Rugged Aluminum Housing, optional finishing with blue epoxy paint per MIL-C-22750 available on request.

Note:

1. Insertion loss refers to the sum of the output power to the input power
2. Standard connector is SMA female for all the ports
3. Other connector combination is available on request
4. Power handling is under the condition that all the outputs are connected to the loads with 1.25:1 or better VSWR and the unit is mounted with excellent heat sink